



TRI MO TRIMOVAL

TRIMOVAL PROFILED METAL SHEET
PRODUCT RANGE




TRIMOVAL PROFILED METAL SHEET

Trimoval is a profiled single skin metal sheet intended for **roofing and cladding** of un-insulated buildings, canopies, shelters or ventilated roofs and façades.

TRIMOVAL TPO 1000

Trimoval TPO 1000 roof covering is made from galvanised and on one-side painted steel sheet metal. There is an 8-10 mm thick insulation layer of polyurethane on the bottom side that prevents the creation of condensation in case of supercooling of the covering. The lower layer of plates is sealed with reinforced aluminium foil.

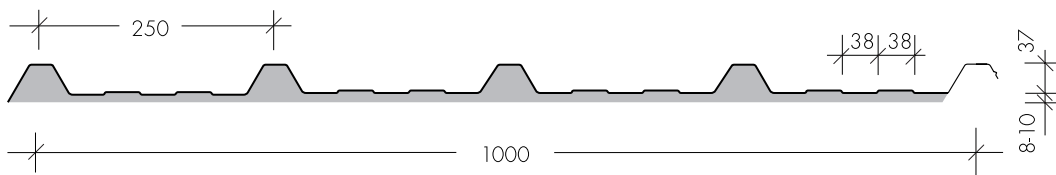




TRIMOVAL TP 1000

Trimoval TP 1000 panels are manufactured from galvanized and painted steel sheet metal, used for cladding roofs and façades of buildings that are not heated or as final cladding of ventilated roofs and façades.

Trimoval TP 1000 is also available with an anti-condensation layer.

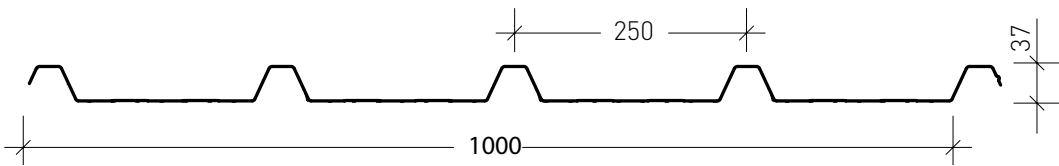

TECHNICAL DATA

TYPE	TPO 1000	TP 1000	TPF 1000
Metal sheet thickness (mm)	Fe 0.55	Fe 0.55	Fe 0.55
Weight (kg / m ²)	6.8	5.3	5.4
Lenght (m)	up to 14	up to 14	up to 14
Roof slope	min. 6°		



STRUCTURAL DESIGN DATA

TYPE	TPO 1000, TP 1000, TPF 1000					
Load (kN / m ²)	0.75	1.00	1.25	1.50	1.75	2.00
Single span	2.05	1.78	1.74	1.64	1.56	1.49
Duble span	2.40	2.40	2.23	2.01	1.83	1.69
Multi span	2.40	2.40	2.21	2.08	1.97	1.85



Trimo d.o.o.

Prijateljeva cesta 12,
8210 Trebnje, Slovenia
t: +386 (0)7 34 60 200
f: +386 (0)7 34 60 127
trimo@trimo-group.com
www.trimo-group.com

